
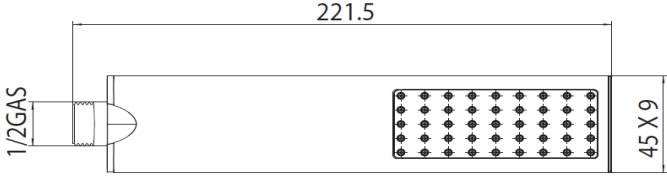
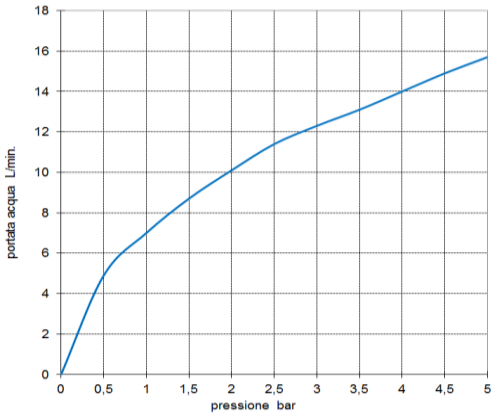


BOSSINI		SCHEDA TECNICA TECHNICAL SHEET		Date: 20/07/2017	Rev/0																										
<b>Codice / Code:</b> <b>B00270</b>		<b>Descrizione / description:</b> Doccia monogetto in ottone Single function Brass handshower																													
		<b>Disegni / drawings</b> 																													
<b>Grafico di portata / Flow rate diagram</b>																															
<table border="1"> <thead> <tr> <th></th> <th>rain</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>4,9</td></tr> <tr><td>1</td><td>7</td></tr> <tr><td>1,5</td><td>8,7</td></tr> <tr><td>2</td><td>10,1</td></tr> <tr><td>2,5</td><td>11,4</td></tr> <tr><td>3</td><td>12,3</td></tr> <tr><td>3,5</td><td>13,1</td></tr> <tr><td>4</td><td>14</td></tr> <tr><td>4,5</td><td>14,9</td></tr> <tr><td>5</td><td>15,7</td></tr> <tr> <td>pressione <b>bar</b></td> <td>portata <b>L/min</b></td> </tr> </tbody> </table>			rain	0	0	0,5	4,9	1	7	1,5	8,7	2	10,1	2,5	11,4	3	12,3	3,5	13,1	4	14	4,5	14,9	5	15,7	pressione <b>bar</b>	portata <b>L/min</b>				
	rain																														
0	0																														
0,5	4,9																														
1	7																														
1,5	8,7																														
2	10,1																														
2,5	11,4																														
3	12,3																														
3,5	13,1																														
4	14																														
4,5	14,9																														
5	15,7																														
pressione <b>bar</b>	portata <b>L/min</b>																														
<b>MATERIALI / materials</b>																															
ABS, Silicone, Nbr, Acetal																															
<b>CARATTERISTICHE IDRAULICHE / hydraulic features</b>																															
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																											
min	<b>1 bar</b>	<b>5L/min</b>	--	Blocco di sicurezza safety lock	/																										
max	<b>5 bar</b>	--	<b>&lt;70°C</b>	Temperatura acqua fredda cold water temperature	/																										
consigliata recommended	<b>2-3 bar</b>	--	<b>&lt;42°C</b>	Temperatura acqua calda hot water temperature	/																										
<b>CERTIFICAZIONI / CERTIFICATIONS:</b> ,IAPMO [ASME A112.18.1/CSA B125.1] (USA/CAN).																															
<b>CONFORMITA' / CONFORMITY :</b> Chrome plating - EN 248.																															