

Self Contained Ice Machine 33 kg

Item #:

Project:

Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- Legs are not included and must be ordered separately as an accessory.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 57
Medium Gourmet 20 g
Ø 30 x H 34 mm



EC S 57
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

12 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.


www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 33 kg

Self Contained Ice Machine 33 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 33 kg

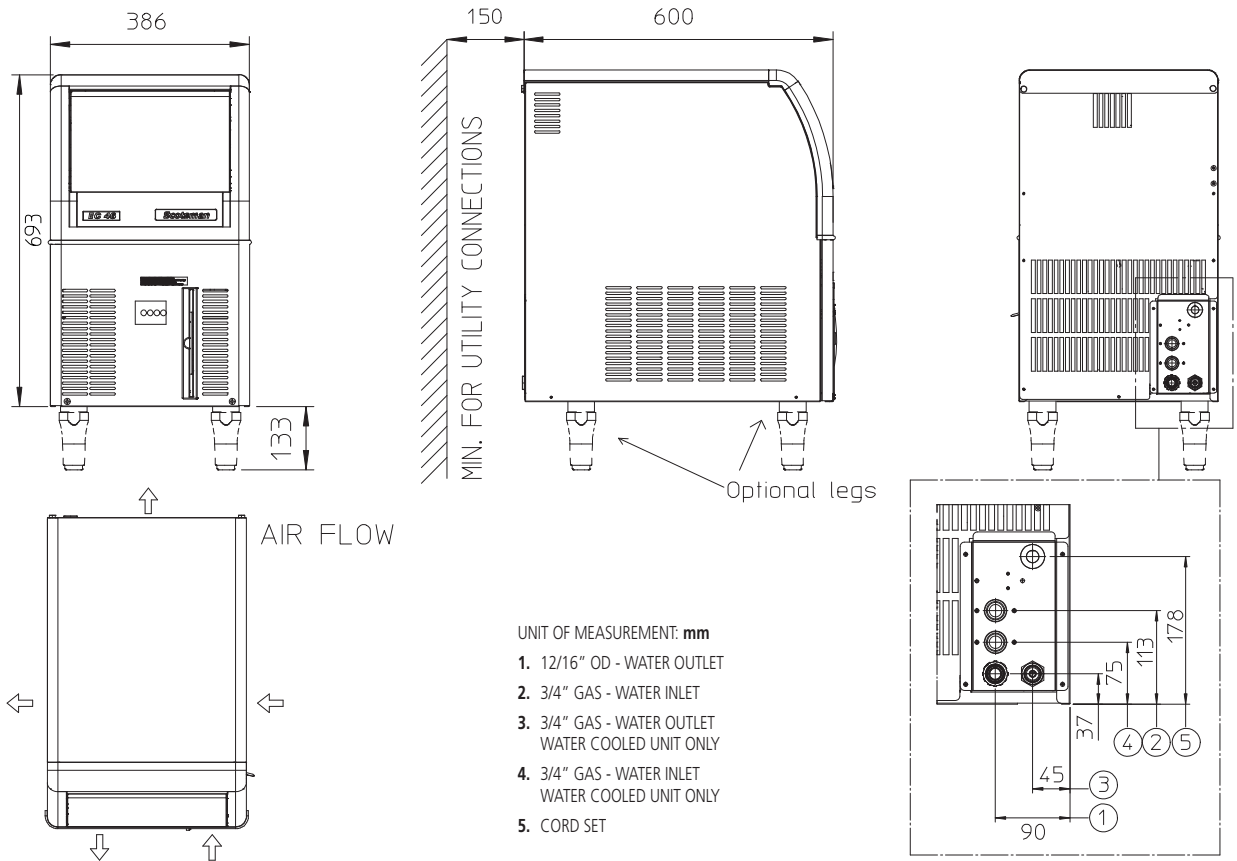

UNIT DATA		SHIPPING DATA									
Size (W x D x H)	386 x 600 x 695 mm	Carton (W x D x H)	460 x 670 x 810 mm								
Net weight	38 kg	Weight	45 kg								
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm ²	A
ECM 57 AS	230/50/1	33	31	25	27.0	6.6	4.0	370	730	1 x 1.5	10
ECM 57 WS	230/50/1	34	33	29	19.7	5.7	23.4	300	730	1 x 1.0	10
ECS 57 AS	230/50/1	28	27	22	30.9	6.8	4.0	370	730	1 x 1.0	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions