


# MF 47 EcoX XSafe

## Modular Ice Machine 300 kg

|           |
|-----------|
| Item #:   |
| Project:  |
| Quantity: |

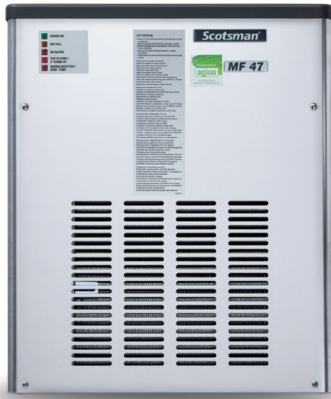

### FEATURES

- Hermetic compressor. Stainless steel auger and freezing cylinder (evaporator). Equipped with an electronic control board.
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry).
- Long-lasting stainless steel ball-bearings. Double protection - electronic rotation sensor and drive coupling - on gear motor and gear reducer.
- Low-water sensor protection on refrigeration and gear motor system. Optical ice level sensor for machine shut down.
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics.
- Side panels are removable on all four sides to ease maintenance and after-sales service operations.
- PS plastic top cover.
- Reduced height to ease installation.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



MF 47  
Superflake ice  
Residual water content 15%

### CONDENSING SYSTEM

Air cooled

### REFRIGERANT GAS

R290

### VOLTAGE V/Hz/ph

230/50/1

### RECOMMENDED BINS

| Head  | Bins          |                | kg       |
|-------|---------------|----------------|----------|
|       | Model         | Code           |          |
| MF 47 | CBT22EFCD     | <b>SB193</b>   | 129      |
|       | CBT22EFCD     | <b>SB322</b>   | 168      |
|       | CBT30EFSD     | <b>SB393</b>   | 181      |
|       | CBT30EFSD     | <b>SB530</b>   | 243      |
|       | CBT42EFSD     | <b>SB550</b>   | 252      |
|       | CBT48FMCD     | <b>SB948</b>   | 406      |
|       | CBT52FMCD     | <b>SB1025</b>  | 478      |
|       | ●             | <b>UBH1100</b> | 553      |
|       | ●             | <b>SIS300</b>  | 137 + 73 |
| ●     | <b>SIS700</b> | 318 + 73       |          |

#### LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

### CERTIFICATIONS



### OPERATING REQUIREMENTS

|                    | Minimum        | Maximum        |
|--------------------|----------------|----------------|
| Air temperature    | 10             | 43             |
| Water temperature  | 5              | 38             |
| Water pressure     | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10%           | +10%           |

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.


[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Modular Ice Machine 300 kg

## Modular Ice Machine 300 kg

|           |
|-----------|
| Item #:   |
| Project:  |
| Quantity: |

Modular Ice Machine 300 kg

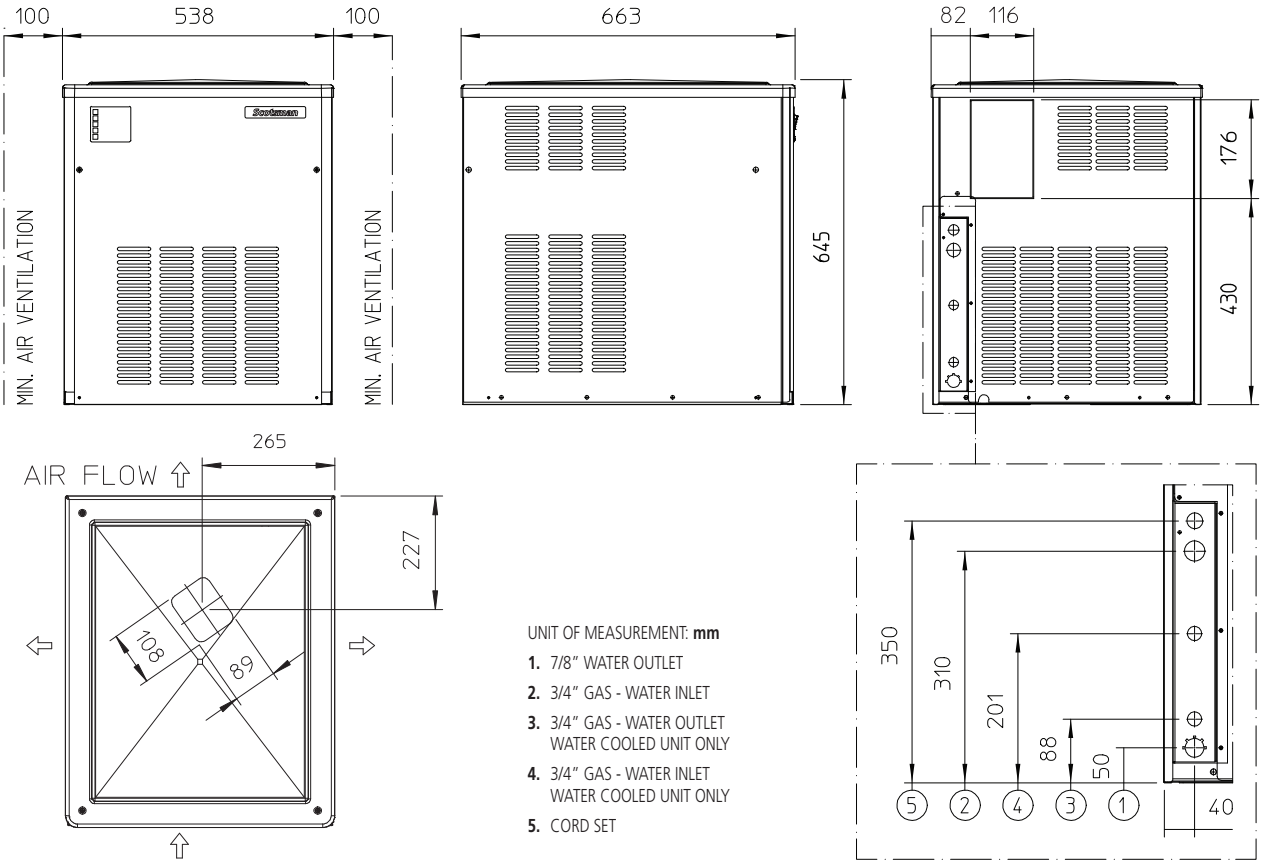

| UNIT DATA        |                    | SHIPPING DATA                                |                    |           |                        |         |                 |               |            |               |                |
|------------------|--------------------|--|--------------------|-----------|------------------------|---------|-----------------|---------------|------------|---------------|----------------|
| Size (W x D x H) | 538 x 663 x 645 mm | Carton (W x D x H)                           | 610 x 760 x 820 mm |           |                        |         |                 |               |            |               |                |
| Net weight       | 78 kg              | Weight                                       | 87 kg              |           |                        |         |                 |               |            |               |                |
|                  |                    | 24 h ice production kg<br>°C Amb. / °C Water |                    |           | Energy consumption (*) |         | Water usage (*) | Instant power | Compressor | Circuit wires | Max. fuse size |
| Version          | Voltage            | 10°C/10°C                                    | 21°C/10°C          | 32°C/21°C | kWh/100 kg             | kWh/24h | l/h             | W             | W          | No. x Ømm²    | A              |
| MF 47 AS         | 230/50/1           | 300  | 265                | 200       | 11.4                   | 22.7    | 8.3             | 1000          | 830        | 3 x 1.5       | 16             |

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions