



FABRICANTES DE  
MOLINOS DE CAFÉ

MANUFACTURERS  
OF COFFEE GRINDERS

Molino de café profesional  
para todo tipo de cafés

Professional coffee grinder  
for all types of coffee.

# LUXOMATIC 500W ALUMINIUM

COLLECTION ON DEMAND

## TECHNICAL CHARACTERISTICS 0-500g/3' Max 4Kg

VOLTAGE: 230V / 220V / 110V  
 FREQUENCY: 50Hz / 60Hz  
 PHASES: 1 (monophase)  
 RPM: 1.300 / 1.600  
 CURRENT: 2,1A / 4,7A  
 CAPACITOR: 14nf / 55nf  
 POWER: 0,37Hp / 497W  
 PROTECTION RATING: IP21  
 MOTOR SUPPLIED WITH THERMAL PROTECTOR  
 MAXIMUM OPERATING TIME: 30min.


TEMPERED STEEL GRINDING WHEELS,(62HRc) ø 65mm  
 LIFESPAN OF GRINDING WHEELS: 500Kg  
 HOPPER CAPACITY: 1Kg  
 HOPPER OPTION: 2Kg

MULTI-LANGUAGE TOUCH SCREEN  
 SELECTION OF 1 OR 2 INSTANT GROUND COFFEE OR CONTINUOUS GROUND  
 COFFEE COUNTER PARTIAL OR TOTAL  
 ASSISTANT TIMER OF THE GRINDING POINT  
 DIMENSIONS WIDTH x LENGTH x HEIGHT: 285X405X625mm  
 WEIGHT: 17,5Kg  
 AIR NOISE: 55dB

Diseñado bajo directiva 89/392 CE.



Grinding blades in tempered steel  
(62HRc) ø 65mm.

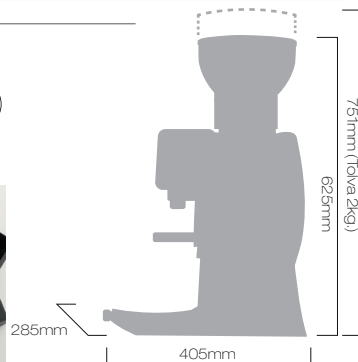

GREY METALLIC SILVER    SNOW WHITE    CHROME SILVER    CHROME GOLD.



55dB



### MAIN ATTRIBUTES

Hopper (1kg) made of unbreakable and non-deformable material (co.poliéster), with fast lock system and self-leveling when off the coffee grinder with the possibility of cleaning in a dishwasher at 90°C. – Micrometric regulation of the coffee grind using a regulatory pawl. – New expulsion system for the ground coffee (always living the grinding cavity clean when the coffee grinder stops). – Touch screen for easy programming and use (Language selection - Adjustment of the grinding program for each dose – Selection of 1 dose, 2 doses or continuous grinding – Coffee counter partial or total). – Integrated coffee tamper with mobile positioner. – Aluminium bodywork made in two parts, especially designed for ventilation, with floating attachment of the inner motor body. – Bodywork finished in painted metallic silver-grey, snow white, chromed gold or chromed silver. – Motor assembly with an anti-vibration system using a pneumatic ring. – Silencer 500W motor with internal auto-ventilation, “55dB”. – Hardened steel grinding blades (62/65HRc) 65mm in diameter.

**Optional: - Personalisation system with chromed plaque on the back of the grinder. – Admits hopper of 2 kg. – Titanium-coated burrs (62/63 HRc) 65mm diameter, 2.000 kg. – Red speed coated burrs (62/63 HRc) 65mm diameter, 3.000 kg.**

