

# SPR120

120 kg Self-contained FLAKER

# SIMAG

Other models in this range: SPR80 - SPR165

## Technical Features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production
- Refrigerant R134a

## 24 Hour Ice Production - 10°C/10° C

Air Cooled 120 kg

Water Cooled 120 kg

## Bin Capacity

kg 55

## Warranty

**2** years warranty on components

## Voltage

230/50/1 standard version

220-240/60/1 version available on demand



## Technology and Certifications



Certified ISO 9001:2008  
TOTAL QUALITY



Residual water content 25%



MILANO OFFICE  
Sales Dept.  
Tel. +39 02 93900215  
e-mail: sales@simag.it  
Service Dept.  
Tel. +39 02 93960357  
e-mail: service@simag.it

SIMAG FAR EAST  
Singapore Office  
Tel. ++65 6738 5393  
e-mail: scotsman@scotsman.com.sg


[www.simag.it](http://www.simag.it)

# SPR120

120 kg Self-contained FLAKER



Other models in this range: SPR80 - SPR165

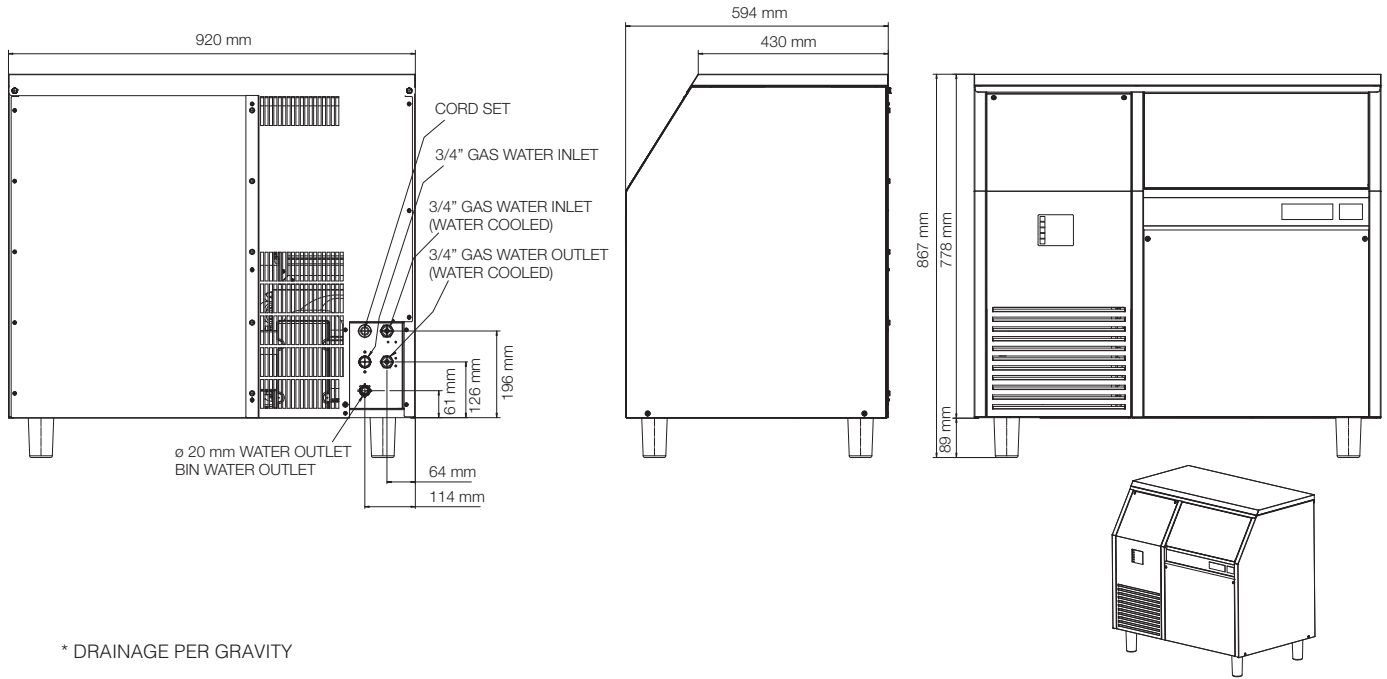

\* DRAINAGE PER GRAVITY

## Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject to change without notice

	Voltage	Power Input Watt (*)	Refrigerant	Refrigerant charge kg	Fuse Amp	Water Consumption l/h (**)	Net Weight kg	Shipping Weight kg
SPR 120 AS	230/50/1	500	R134a	0,44	10	4,2	69	n.a.
SPR 120 AS	220-240/60/1	n.a.	R134a	n.a.	10	n.a.	69	n.a..
SPR 120 WS	230/50/1	500	R134a	0,38	10	29	69	n.a.
SPR 120 WS	220-240/60/1	n.a.	R134a	n.a.	10	n.a.	69	n.a.

(\*) Power Input: at 43°C Ambient Temperature

(\*\*) Water Consumption: at 32°C Air and 21°C Water