



FABRICANTES DE
MOLINOS DE CAFÉ

MANUFACTURERS
OF COFFEE GRINDERS

Molino de café profesional
para todo tipo de cafés

Professional coffee grinder
for all types of coffee.

TRANQUILO II

ABS

COLLECTION CLASSIC

TECHNICAL CHARACTERISTICS 0-500gr/6' Max 1Kg



Voltage: 230V / 220V / 110V
Frequency: 50Hz / 60Hz
Phases: 1(monophase)
RPM: 1.300 / 1.600
Current: 1.15A / 2,47A
Capacitor: 10nf / 40nf
Power: 0,10Hp / 270W
Protection rating: IP21
Motor supplied with thermal protector
Maximum operating time: 30 min.
Tempered steel grinding wheel (62HRc) ø 60mm
Lifespan of grinding wheels: 500kg
Hopper capacity: 1/2kg
Doser capacity: 300g
Doser regulation: 5/12g
Doser lever: right/left
Stop/start standard version: manual start
Dimensions width x length x height: 170x340x410mm

Weight: 6kg
Air noise: 77dB

Diseñado bajo directiva 89/392 CE.



Grinding blades in tempered steel
(62HRc) ø 60mm.

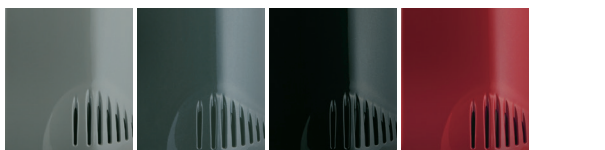

GREY DARK GREY BLACK PURPLE



MAIN ATTRIBUTES

Hopper (1/2kg) made of unbreakable and non-deformable material (co.polyester), with fast lock system and self-levelling when off the coffee grinder, with the possibility of cleaning in a dishwasher at 90 °C. Micrometric regulation of the coffee grind using a regulatory pawl. New expulsion system for the ground coffee (always leaving the grinding cavity clean when the coffee grinder stops). Bodywork manufactured in anti-scratch material, in a single piece (less vibrations, more robustness). With ventilation system (internal air inlet and outlet). Tray integrated into the bodywork. Single-bodied, hermetically sealed doser without aroma loss, vibrationless and made of unbreakable material. Ergonomic handle. Universal coffee tamper (rotatable). Doser fitted with gasket-saver (portafilter positioner). Hardened steel grinding blades (62/65HRc) 60mm in diameter.

Optional: Left- or right-handed doser lever. Coffee counter. Optional customisation system on the doser in chrome plate.

