




MIBRASA CHARCOAL OVEN HMB AC C 75, 110, 160

Oven with full cupboard and extraction hood

MIBRASA®

TECHNICAL INFORMATION	HMB MINI	HMB 75	HMB 110	HMB 160
Diners*	35	75	110	160
Fire up time* (min)	20	25	30	35
Cooking temperature (°F)	482-662	482-662	482-662	482-662
Cooking temperature (°C)	250-350	250-350	250-350	250-350
Charcoal consumption* (lb/day)	16	29	40	45
Production* (lb/h)	55	154	220	265
Performance* (h)	8	9	10	10
Useful dimensions of grill (mm)	500 x 350	500 x 600	720 x 600	720 x 800
Equivalent power* (hp)	2,7	4,7	6,7	8
Exhaust rate (ft ³ /s)	24,52	27,47	31,39	34,33

* Approximate data

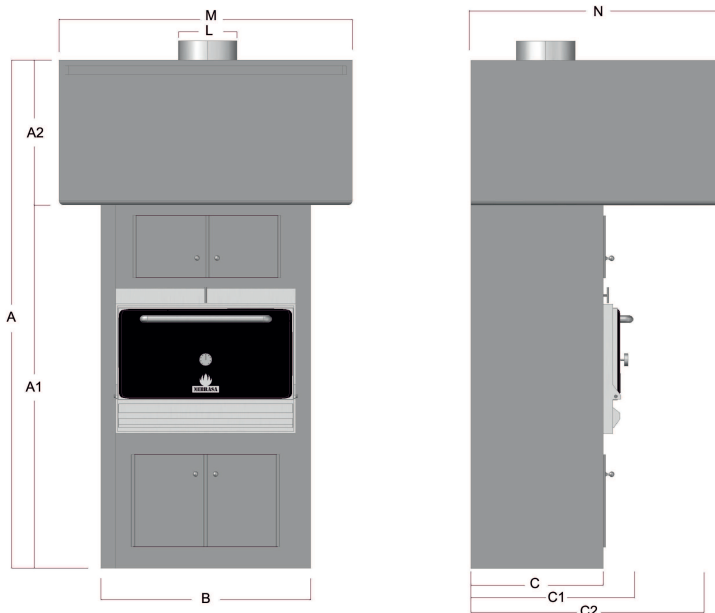

Model	A	A1	A2	B	C	C1	C2	L	M	N
HMB AC C 75	2470	1870	600	850	650	830	1090	300	1300	1300
HMB AC C 110	2470	1870	600	1070	650	830	1180	300	1500	1300
HMB AC C 160	2470	1870	600	1070	850	1030	1370	300	1500	1500

INCLUDED ACCESSORIES


- Grill
- Oven tongs
- Charcoal ember poker
- Ash shovel
- Grill brush
- Firebreak

OPTIONAL ACCESSORIES

- Extra grill
- Cookware
- Steel wheels with brakes

OVEN'S DESCRIPTION

The air inlet is controlled by opening or closing the ash collector.

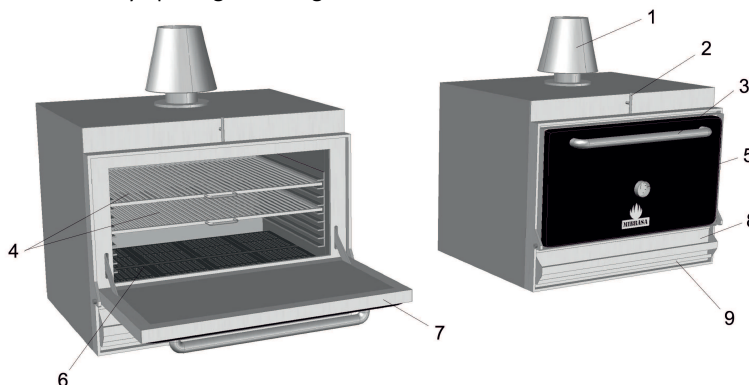

1. Firebreak
2. Pull regulator (■ Closed / ▨ Open)
3. Door handle
4. Grills
5. Thermometer
6. Indoor grids
7. Door
8. Grease collector
9. Ash collector